


VACON 10
AC DRIVES

QUICK GUIDE
API RS-485

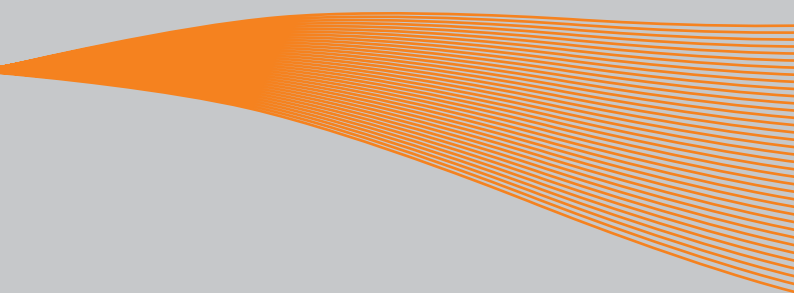

This quick guide includes the essential steps for easy installation and setup of your Vacon 10 frequency converter. Before commissioning your drive, download and read the complete Vacon 10 User Manual available at:
www.vacon.com -> Support & Downloads

1. SAFETY



ONLY A COMPETENT ELECTRICIAN IS ALLOWED TO CARRY OUT THE ELECTRICAL INSTALLATION!

This quick guide contains clearly marked warnings which are intended for your personal safety and to avoid any unintentional damage to the product or connected appliances.

Please read these warnings carefully:



The components of the power unit of the frequency converter are live when Vacon 10 is connected to mains potential. Coming into contact with this voltage is extremely dangerous and may cause death or severe injury.



The motor terminals U, V, W (T1, T2, T3) and the possible brake resistor terminals R+/R- are live when Vacon 10 is connected to mains, even if the motor is not running.



The control I/O-terminals are isolated from the mains potential. However, the relay output terminals may have a dangerous control voltage present even when Vacon 10 is disconnected from mains.



The earth leakage current of Vacon 10 frequency converters exceeds 3.5mA AC. According to standard EN61800-5-1, a reinforced protective ground connection must be ensured.
See Chapter 7!



If the frequency converter is used as a part of a machine, the machine manufacturer is responsible for providing the machine with a main switch (EN 60204-1).



If Vacon 10 is disconnected from mains while running the motor, it remains live if the motor is energized by the process. In this case the motor functions as a generator feeding energy to the frequency converter.



After disconnecting the frequency converter from the mains, wait until the fan stops and the status leds on the front panel go out. Wait 5 more minutes before doing any work on Vacon 10 connections.



The motor can start automatically after a fault situation, if autoreset function has been activated.

2. INSTALLATION

2.1 Mechanical installation

There are two possible ways to mount Vacon 10 in the wall; either screw or DIN-rail mounting.

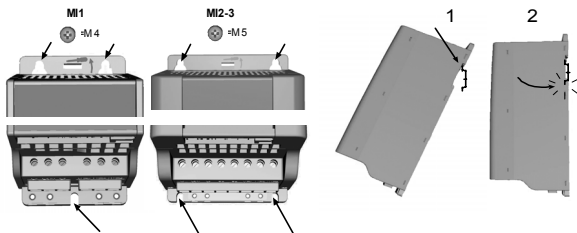


Figure 1: Screw mounting (left) and DIN-rail mounting (right)

NOTE! See the mounting dimensions on the back of the drive.
Leave **free space** for cooling above (**100 mm**) and below (**50 mm**) Vacon 10!

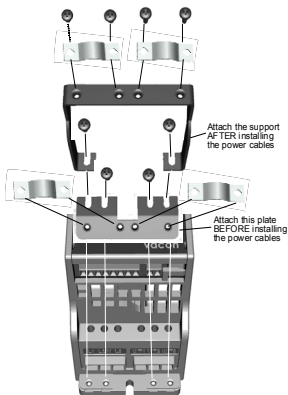


Figure 2: Attaching the PE-plate and API cable support

2.2 Cabling and connections

2.2.1 Power cabling

Note! Tightening torque for power cables is 0.5 - 0.6 Nm

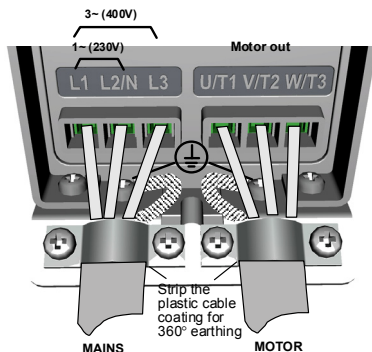


Figure 3: Vacon 10 power connections, MI1

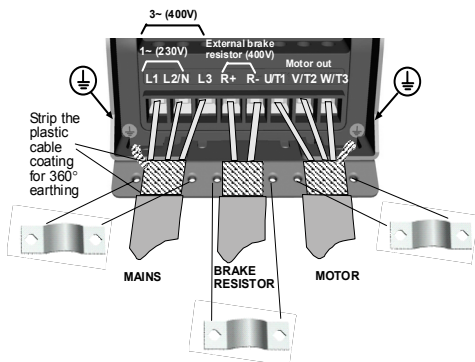


Figure 4: Vacon 10 power connections, MI2 - MI3

2.2.2 Control cabling

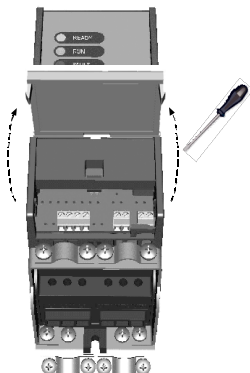


Figure 5: Open the cover




Figure 6: Install the control cables. See next page!

3. CONTROL I/O AND TERMINALS

Vacon 10 I/O terminals for API RS-485:

Terminal	Signal	Factory preset	Description
3	GND	I/O signal ground	
6	24Vout	24V output for DI	±20 %, max. load 50 mA
7	GND	I/O signal ground	
8	DI1	Digital input 1	
A	A	RS485 signal A	FB Communication
B	B	RS485 signal B	FB Communication
24	RO 21	Relay out 2 ACTIVE (Relay opened) = FAULT ^{PI}	Max. switching load: 250Vac/2A or 250Vdc/ 0,4A
25	RO 22		

Table 1: Vacon 10 General purpose application default I/O configuration and connections for API RS-485 version

Vacon 10 RS-485 I/O terminals:

3	6	7	8
○	○	○	○
GND	24V	GND	DI1

○	○
A	B

25	24
○	○
RO2	RO2

4. NAVIGATION & STARTUP

4.1 The status LEDs of Vacon 10 RS-485

There are three status LED lights on the front panel of Vacon 10 RS-485. The LEDs indicate the status of the drive, provide the user with information on faults and help the user to select the control place or fieldbus address.






Figure 1: The status LEDs of Vacon 10 RS-485

The following figures present the functionality of the status LEDs in different situations:

READY LED on: Vacon 10 is ready for operation




READY and RUN LEDs on:
Vacon 10 is running the motor



Red LED on:
Vacon 10 is not ready
(e.g. supply voltage too low)

Red LED is blinking:
there is an active fault
(See chapter 6)



4.2 Commissioning

4.2.1 Commissioning steps:

1. Read safety instructions on page 1
2. Secure the grounding and check that cables comply with requirements
3. Check quality and quantity of cooling air
4. Check that the possible start/stop switch is in STOP position
5. Connect the drive to mains
6. <i>This step is not valid for API RS-485</i>
7. Perform test run without motor, see the User Manual at www.vacon.com
8. Run no-load tests without motor being connected to the process
9. Connect the motor to the process and perform test run once again
10. Vacon 10 rs-485 is now ready for use


Table 1: Commissioning steps

4.3 Selection of control place or fieldbus address

In Vacon 10 RS-485 the user can select the control place and Modbus slave address without connecting the drive to PC. The procedures are described below.

4.3.1 Selection of control place


- 1) Press the STOP button for 5 seconds in STOP state, the READY and FAULT LEDs start to blink in turns:

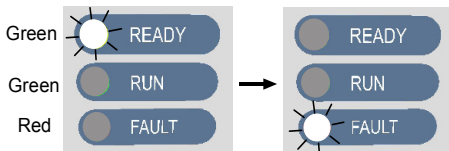

- 2) Press the STOP-button to proceed to the next step



- 3) Keypad control place selection, all LEDs are off




The keypad is now the control place and frequency reference source of the drive and the drive is ready for operation.

NOTE! When keypad is selected as the control place, Vacon RS-485 starts forward when the START button is pressed. The frequency reference can be increased for 5Hz with each press of the button.

4.3.2 Selection of fieldbus address

- 1) Press the STOP button for 5 seconds, the READY and FAULT LEDs start to blink in turns:



- 2) Press the STOP-button to proceed to the next step




- 3) Keypad control place selection, all LEDs are off



PRESS



- 4) Modbus slave address selection. The slave addresses are binary coded and indicated with blinking LEDs. Press the STOP button to move to the next address:

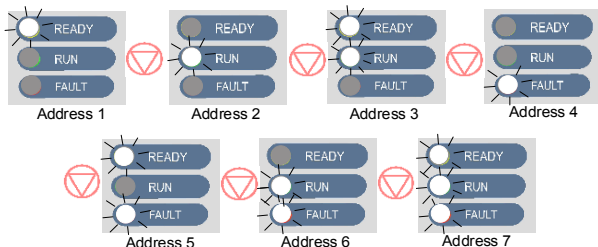

Confirm the desired address with START button:



Vacon 10 will return to READY state and fieldbus is now the control place and frequency reference source of the drive. Via PC tools or fieldbus the address can be selected between 1 and 255. (NOTE: if no button is pressed in 30 seconds, the drive will always return to READY state)

5. MONITORING & PARAMETERS

Note! Complete parameter listing and descriptions are given in Vacon 10 User Manual, available at: www.vacon.com -> Support & Downloads

5.1 Monitoring values

Code	Monitoring signal	Unit	ID	Description
M1.1	Output frequency	Hz	1	Frequency to the motor
M1.2	Frequency reference	Hz	25	
M1.3	Motor shaft speed	rpm	2	Calculated motor speed
M1.4	Motor current	A	3	Measured motor current
M1.5	Motor torque	%	4	Calculated actual/nominal torque of the motor
M1.6	Motor power	%	5	Calculated actual/nominal power of the motor
M1.7	Motor voltage	V	6	Motor voltage
M1.8	DC-link voltage	V	7	Measured DC-link voltage
M1.9	Unit temperature	°C	8	Heat sink temperature
M1.10	Motor temperature	°C		Calculated motor temperature
M1.14	DI1		15	Digital input status. When DI1 is active, PC tool indicates '100'
M1.16	RO2		17	Relay output status When RO1 is active, PC tool indicates '10'
M1.17	PI setpoint	%	20	In percent of the maximum process reference
M1.18	PI feedback	%	21	In percent of the maximum actual value
M1.19	PI error value	%	22	In percent of the maximum error value
M1.20	PI Output	%	23	In percent of the maximum output value

Table 1: Vacon 10 API RS-485 monitoring values (General purpose application)

5.2 Quick setup parameters

Code	Parameter	Min	Max	Unit	Default	ID	Note
P1.1	Motor nominal voltage	180	500	V	230 400	110	Check rating plate on the motor
P1.2	Motor nom. frequency	30	320	Hz	50,00	111	Check rating plate on the motor
P1.3	Motor nominal speed	300	20000	rpm	1440	112	Default applies for a 4-pole motor.
P1.4	Motor nominal current	0,2 x I _{Nunit}	1,5 x I _{Nunit}	A	I _{Nunit}	113	Check rating plate on the motor
P1.5	Motor cos ϕ	0,30	1,00		0,85	120	Check rating plate on the motor
P1.7	Current limit	0,2 x I _{Nunit}	2 x I _{Nunit}	A	1,5 x I _{Nunit}	107	
P1.15	Torque boost	0	1		0	109	0 = Not used 1 = Used
P2.1	Control place	1	3		3	125	1 = I/O terminal 2 = Keypad 3 = Fieldbus
P2.2	Start function	0	1		0	505	0 = Ramp 1 = Flying start
P2.3	Stop function	0	1		0	506	0 = Coasting 1 = Ramp
P3.1	Min frequency	0,00	P3.2	Hz	0,00	101	
P3.2	Max frequency	P3.1	320	Hz	50,00	102	
P3.3	I/O reference	0	2		2	117	0 = Preset Speeds 1 = Keypad Reference 2 = Fieldbus Reference
P3.4	Preset speed 0	0,00	P3.2	Hz	5,00	124	Activated by digital inputs
P3.5	Preset speed 1	0,00	P3.2	Hz	10,00	105	Activated by digital inputs
P4.2	Acceleration time	0,1	3000	s	1,0	103	
P4.3	Deceleration time	0,1	3000	s	1,0	104	
P10.4	Automatic restart	0	1		0	731	0 = Not used 1 = Used
P13.1	Parameter conceal	0	1		1	115	0 = All parameters visible 1 = Only basic parameters

Table 2: Quick setup parameters (General purpose application)

5.3 System menu parameters

Code	Parameter	Min	Max	Default	ID	Note
Software information (MENU PAR -> S1)						
S1.1	Software package				833	
S1.2	Power SW version				834	
S1.3	API SW version				835	
S1.4	API Firmware interface				836	
S1.5	Application ID				837	
S1.6	Application revision				838	
S1.7	System load				839	
RS485 information (MENU PAR -> S2)						
S2.1	Communication status				808	Format: xx.yyy xx = 0 - 64 (Number of error messages) yyy = 0 - 999 (Number of good messages)
S2.2	Fieldbus protocol	0	1	1	809	0 = FB disabled 1 = Modbus
S2.3	Slave address	1	255		810	
S2.4	Baud rate	0	5	5	811	0 =300, 1 =600, 2 =1200, 3 =2400, 4 =4800, 5 =9600,
S2.5	Number of stop bits	0	1	1	812	0 =1, 1 =2
S2.6	Parity type	0	0	0	813	0 = None (locked)
S2.7	Communication time-out	0	255	0	814	0 = Not used, 1 = 1 second, 2 = 2 seconds, etc.
S2.8	Reset communication status				815	1 = Resets par. S2.1
Total counters (MENU PAR -> S3)						
S3.1	MWh counter	0	1	0	827	
S3.2	Power on days	0	1	0	828	
S3.3	Power on hours	0	1	0	829	
User settings (MENU PAR -> S4)						
S4.2	Restore factory defaults	0	1	0	831	1 = Restores factory defaults

Table 3: System menu parameters

6. FAULT TRACING

In Vacon 10 RS-485, the red FAULT LED gives information on the active faults to the user. The red LED blinks in certain sequences according to the fault type. The sequences are presented below:

■ = short pulse
 ■■■■■ = long pulse

Red LED blinking sequence	Fault code	Fault name
■■■■■ ■	1	Overcurrent
■ ■■■■■	2	Overvoltage
■■■■■ ■■■■■ ■	3	Earth fault
■■■■■ ■ ■■■■■	8	System fault
■ ■■■■■ ■■■■■	9	Undervoltage
■■■■■ ■ ■	13	Frequency converter undertempera- ture
■ ■■■■■ ■	14	Frequency converter overtemperature
■ ■ ■■■■■	15	Motor stalled
■■■■■ ■■■■■ ■■■■■ ■	16	Motor overtemperature
■■■■■ ■■■■■ ■ ■■■■■	22	EEPROM checksum fault
■■■■■ ■ ■■■■■ ■■■■■	25	Microcontroller watchdog fault
■ ■■■■■ ■■■■■ ■■■■■	34	Internal bus communication
■■■■■ ■■■■■ ■ ■	35	Application fault
■ ■■■■■ ■■■■■ ■	51	External fault
■■■■■ ■ ■ ■■■■■	53	Fieldbus fault

Table 1: Fault codes. See User Manual for detailed fault descriptions.

7. GENERAL DATA

Dimensions and weight	Frame	Height Width Depth (mm) Weight (kg)
	MI1	156,5 65,5 98,5 0,55
	MI2	195 90 101,5 0,70
	MI3	262,5 100 108,5 0,99
Supply network	Networks	Vacon 10 480 V cannot be used with corner grounded networks
	Short circuit current	Maximum short circuit current has to be < 50kA
Motor connection	Output voltage	0 - U_{in}
	Output current	Continuous rated current I_N at ambient temperature max. +50°C, overload 1.5 x I_N max. 1min/10min
Ambient conditions	Ambient operating temperature	-10°C (no frost)...+50°C: rated loadability I_N
	Storage temperature	-40°C...+70°C
	Enclosure class	IP20
	Relative humidity	0...95% RH, non-condensing, non-corrosive, no dripping water
	Altitude	100% load capacity (no derating) up to 1000m. 1% derating for each 100m above 1000m; max. 2000m
EMC	Immunity	Complies with EN50082-1, -2, EN61800-3
	Emissions	230V : Complies with EMC category C2 (Vacon level H); With an internal RFI filter 400V: Complies with EMC category C2 (Vacon level H); With an internal RFI filter Both: No EMC emission protection (Vacon level N): Without RFI filter See detailed descriptions in Vacon 10 User Manual at: www.vacon.com/support
Standards		For EMC: EN61800-3, For safety: UL508C, EN61800-5-1
Certificates and manufacturer's declarations of conformity		For safety: CB, CE, UL, cUL, For EMC: CE, CB, c-tick [see unit nameplate for more detailed approvals]

Cable and fuse requirements	Frame	Fuse (A)	Mains cable Cu (mm ²)	Terminal cable min-max (mm ²)	
				Main & earth	Control & relay
380 - 500V	MI1	6	3*1.5+1.5	1.5-4	0.5-1.5
	MI2	10		1.5-4	
	MI3	20	3*2.5+2.5	1.5-6	
208 - 240V	MI1	10	2*1.5+1.5	1.5-4	
	MI2	20	2*2.5+2.5	1.5-4	
	MI3	32	2*6+6	1.5-6	

- With above-mentioned fuses, the drive can be connected to power supply the short circuit current of which is max. 50kA
- Use cables with heat resistance of at least +70 C.
- The fuses function also as cable overload protection.

- These instructions apply only to cases with one motor and one cable connection from the frequency converter to the motor.
- To fulfil standard EN61800-5-1, the protective conductor should be **at least 10mm² Cu or 16mm² Al**. Another possibility is to use an additional protective conductor of at least the same size as the original one.

Vacon 10 power ratings

Mains voltage 208-240 V, 50/60 Hz, 1~ series					
Frequency converter type	Rated loadability		Motor shaft power	Nominal input current	Mechanical size
	100% contin. current I_N [A]	150% overload current [A]	P [kW]	[A]	
Vacon 10-1L-0001 - 2	1,7	2,6	0,25	4,2	MI1
Vacon 10-1L-0002 - 2	2,4	3,6	0,37	5,7	MI1
Vacon 10-1L-0003 - 2	2,8	4,2	0,55	6,6	MI1
Vacon 10-1L-0004 - 2	3,7	5,6	0,75	8,3	MI1
Vacon 10-1L-0005 - 2	4,8	7,2	1,1	11,2	MI2
Vacon 10-1L-0007 - 2	7,0	10,5	1,5	14,1	MI2
Vacon 10-1L-0009 - 2 *	9,6	14,4	2,2	15,8	MI3

* The maximum ambient operating temperature of Vacon 10-1L-0009 - 2 is **+40°C!**

Mains voltage 380-480 V, 50/60 Hz, 3~ series					
Frequency converter type	Rated loadability		Motor shaft power	Nominal input current	Mechanical size
	100% continuous current I_N [A]	150% overload current [A]	380-480V supply P [kW]	[A]	
Vacon 10-3L-0001 - 4	1,3	2,0	0,37	2,2	MI1
Vacon 10-3L-0002 - 4	1,9	2,9	0,55	2,8	MI1
Vacon 10-3L-0003 - 4	2,4	3,6	0,75	3,2	MI1
Vacon 10-3L-0004 - 4	3,3	5,0	1,1	4,0	MI1
Vacon 10-3L-0005 - 4	4,3	6,5	1,5	5,6	MI2
Vacon 10-3L-0006 - 4	5,6	8,4	2,2	7,3	MI2
Vacon 10-3L-0008 - 4	7,6	11,4	3,0	9,6	MI3
Vacon 10-3L-0009 - 4	9,0	13,5	4,0	11,5	MI3
Vacon 10-3L-0012 - 4	12,0	18,0	5,5	14,9	MI3

Note: The input currents are calculated values with 100 kVA line transformer supply.

head office and
production:
Vaasa
Vacon Plc
Runsorintie 7
65380 Vaasa
firstname.lastname@vacon.com
telephone: +358 (0)201 2121
fax: +358 (0)201 212 205

production:
Suzhou, China
Vacon Suzhou Drives Co. Ltd.
Building 11A
428# Xinglong Street, SIP
Suchun Industrial Square
Suzhou 215126
telephone: +86 512 62836630
fax: +86 512 62836618

Naturno, Italy
Vacon S.R.I
Via Zone Industriale, 11
39025 Naturno

production:
Chambersburg, USA
3181 Black Gap Road
Chambersburg, PA 17202

TB Wood's (India) Pvt. Ltd.
#27, 'E' Electronics City
Hosur Road
Bangalore - 560 100
India
Tel. +91-80-30280123
Fax. +91-80-30280124

sales companies and representative offices:

finland
Helsinki
Vacon Plc
Äyritie 8
01510 Vantaa
telephone: +358 (0)201 212 600
fax: +358 (0)201 212 699

Tampere
Vacon Plc
Vehmämyllykatu 18
33580 Tampere
telephone: +358 (0)201 2121
fax: +358 (0)201 212 750

australia
Vacon Pacific Pty Ltd
5/66-74, Micro Circuit
Dandenong South, VIC 3175
telephone: +61 (0)3 9238 9300
fax: +61 (0)3 92389310

austria
Vacon AT Antriebssysteme GmbH
Aumühlweg 21
2544 Leobersdorf
telephone: +43 2256 651 66
fax: +43 2256 651 66 66

belgium
Vacon Benelux NV/SA
Interleuvenlaan 62
3001 Heverlee (Leuven)
telephone: +32 (0)16 394 825
fax: +32 (0)16 394 827

brazil
Vacon Brazil
Alameda Mamoré, 535
Alphaville - Barueri - SP
Tel. +55 11 4166-5707
Fax. +55 11 4166-5567

canada
Vacon Canada
221 Griffith Road
Stratford, Ontario N5A 6T3
telephone: +1 (519) 508-2323
fax: +1 (519) 508-2324

china
Vacon Suzhou Drives Co. Ltd.
Beijing Branch
A528, Grand Pacific Garden Mansion
8A Guanghua Road
Beijing 100026
telephone: +86 10 51280006
fax: +86 10 65813733

czech republic
Vacon s.r.o.
Kodanska 1441/46
110 00 Prague 10
telephone: +420 234 063 250
fax: +420 234 063 251

france
Vacon France
ZAC du Fresne
1 Rue Jacquard - BP72
91280 Saint Pierre du Perray CDIS
telephone: +33 (0)1 69 89 60 30
fax: +33 (0)1 69 89 60 40

germany
Vacon GmbH
Gladbecker Strasse 425
45329 Essen
telephone: +49 (0)201 806 700
fax: +49 (0)201 806 7099

Vacon OEM Business Center GmbH
Industriest. 13
51709 - Marienheide
Germany
Tel. +49 02264 17-17
Fax. +49 02264 17-126

india
Vacon Drives & Control Plc
Plot No 352
Kapaleeshwar Nagar
East Coast Road
Neelengarai
Chennai-600041
Tel. +91 44 244 900 24/25

italy
Vacon S.p.A.
Via F.lli Guerra, 35
42100 Reggio Emilia
telephone: +39 0522 276811
fax: +39 0522 276890

the netherlands
Vacon Benelux BV
Weide 40
4206 CJ Gorinchem
telephone: +31 (0)183 642 970
fax: +31 (0)183 642 971

norway
Vacon AS
Bentsrudveien 17
3080 Holmestrand
telephone: +47 330 96120
fax: +47 330 96130

romania
Vacon Romania - Reprezentanta
Cuza Voda 1
400107 Cluj Napoca
Tel. +40 364 118 981
Fax. +40 364 118 981

russia
ZAO Vacon Drives
UL Letchika Babushkina 1,
Stroenie 3
129344 Moscow
telephone: +7 (495) 363 19 85
fax: +7 (495) 363 19 86
ZAO Vacon Drives
2ya Sovetskaya 7, office 210A
191036 St. Petersburg
telephone: +7 (812) 332 1114
fax: +7 (812) 279 9053

slovakia
Vacon s.r.o. (Branch)
Seberiniho 1
821 03 Bratislava
Tel. +421 243 330 202
Fax. +421 243 634 389

spain
Vacon Drives Ibérica S.A.
Miquel Servet, 2. P.I. Bufalvent
08243 Manresa
telephone: +34 93 877 45 06
fax: +34 93 877 00 09

sweden
Vacon AB
Anderstörpsvägen 16
171 54 Solna
telephone: +46 (0)8 293 055
fax: +46 (0)8 290 755

thailand
Vacon South East Asia
335/32 5th-6th floor
Srinakarin Road, Prawet
Bangkok 10250
Tel. +66 (0)2366 0768

ukraine
Vacon Drives Ukraine (Branch)
42-44 Shovkovychna Str.
Regus City Horizon Tower
Kiev 01601, Ukraine
Tel. +380 44 459 0579
Fax +380 44 490 1200

united arab emirates
Vacon Middle East and Africa
Block A, Office 4A 226
P.O.Box 54763
Dubai Airport Free Zone
Dubai
Tel. +971 (0)4 204 5200
Fax: +971 (0)4 204 5203

united kingdom
Vacon Drives (UK) Ltd.
18, Maizefield
Hinckley Fields Industrial Estate
Hinckley
LE10 1YF Leicestershire
telephone: +44 (0)1455 611 515
fax: +44 (0)1455 611 517

united states
Vacon, Inc.
3181, Black Gap Road
Chambersburg, PA 17202
telephone: +1 (877) 822-6606
fax: +1 (717) 267-0140



DPD00141